

pi·lit



Smart IR Landing Zone Kit


Our Smart Infrared Landing Zone Kit safely guides rotary wing pilots to a designated landing zone. The IR LEDs and “Constellation” effect creates a distinct and easy to identify landing area.

Key Features

- › **850 nm Infrared LEDs**
Standard on all builds
- › **RF Synchronized Flash**
“Constellation” effect
- › **Quick Turn On & Deployment**
Rapid Deployment System
- › **Roll On, Roll Off Flash Pattern**
Steady-glow pattern
- › **Crush Proof**
50,000 lbs (22,600 kgs)
- › **IP67**
Dust and Water Resistance
- › **Ballast Range Extender**
Weighted Base Included
- › **20 HR Battery Life**
6hr charge time from depleted battery



Built, designed, supported in the U.S.A.

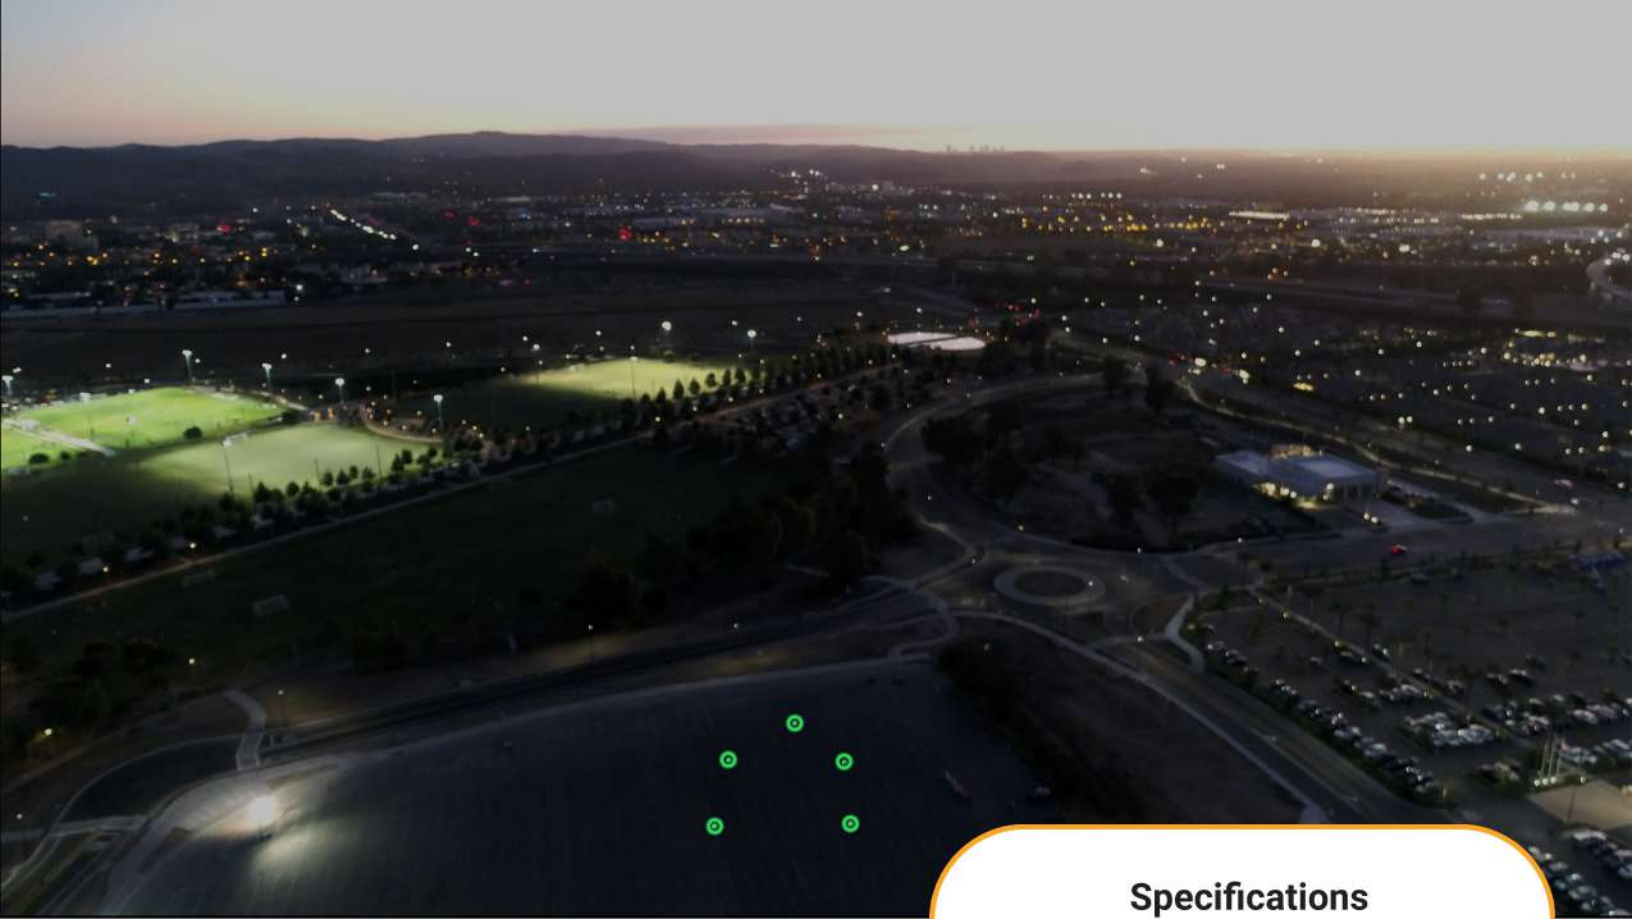

LZ Models:

	RDS	Set Sizes:	Color
Rechargeable Set (ICSG2LZGIRG-5RE) 1750mAh Lithium Battery (20 hours of continuous flashing)	YES	5 LZ Flares 5 Ballasts	IR Top LEDs Green Side LED
AA-Alkaline Battery Set (ICSG2LZGIRG-5) 4-AA Alkaline Batteries (30 hours of continuous flashing)	NO	5 LZ Flares 5 Ballasts	IR Top LEDs Green Side LED

Contact us at:



info@pi-lit.com
www.pi-lit.com

+1.949.415.9411

Built, designed, supported in the U.S.A.



Specifications

- › **2.4 GHz RF Communication**
100ft range between flares (FCC compliant)
- › **Infrared Top/Visible Green Side LEDs**
850nm IR LEDs for NVG
- › **IP67**
Dust and Water Resistance
- › **5+ miles (8 km) visibility**
360-degree horizontal viewing angle
180-degree vertical projection



- › **Supplied with:** Carrying/charging case, 5 smart IR LZ flares, 5 Ballast Weighted Range Extenders, DC 12/24V vehicle plug, AC 110/240V wall plug, 2-year warranty