





THE NEW SUPERIOR PENTHEON SERIES UNRESTRAINED PERFORMANCE FOR YOUR MISSION.

All around the world first responders work in the most extreme conditions to save people's lives. They are faced with different challenges every day, all requiring quick decision making and solid teamwork. Working under pressure, in a race against the clock, first responders need equipment they can fully rely on. It is for these men and women that we have developed our new Pentheon Series: High-tech rescue tools that are miles ahead of all other equipment on the market, cordless and hose tools alike.

Only the Holmatro Pentheon Series offers you the unrestrained performance, unparalleled speed and ultimate control you've never experienced before!



- CUTTER PCU50 -

- TELESCOPIC RAM PTR50 -

- COMBI TOOL PCT50 -

- SPREADER PSP40 -








holmatro



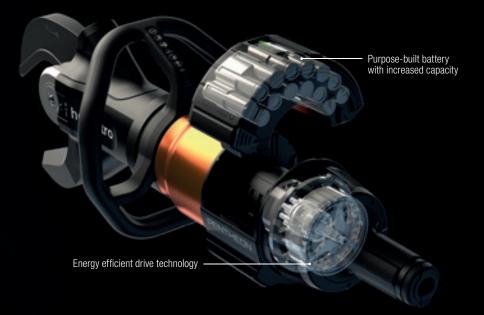

MAXIMUM ENDURANCE EXTENDED WORKING TIME

Holmatro Pentheon tools help you get more work done without swapping batteries. These are the reasons why.

PURPOSE-BUILT BATTERY WITH INCREASED CAPACITY

Specially developed to power our high-performance Pentheon tools, this battery contains extra large and powerful cells. Thanks to the bigger cell volume, it heats up much slower than regular batteries. This means you can complete more work, while using its maximum power.

ENERGY EFFICIENT DRIVE TECHNOLOGY

The patented mechatronic system that controls the motor and pump settings of our Pentheon tools is extremely energy efficient. Especially when compared to the drive technology used in other cordless rescue tools. All with the aim to extend your working time.

AUTO START/STOP FUNCTION: NO ENERGY WASTE

When the tool is not operated or has reached its maximum pressure, the motor stops automatically. This saves valuable battery capacity. Simply turn the control handle to restart the tool.





USER CENTERED DESIGN BATTERY MANAGEMENT MADE EASY

What if battery management could be made as simple as just plugging it in? Well, that's exactly what we have done!

ON-TOOL CHARGING

Stop swapping batteries! From now on you can charge the battery while it's still on the tool. Simply connect the tool to the charger and the whole charging process will regulate itself. The battery on the tool always has priority over the one on the charger, which will resume charging when the battery on the tool is 100% full. You can connect up to 3 chargers to be powered from a single outlet. This allows you to charge 6 batteries without any management.

MAGNETIC CONNECTOR

Easy connection and no disconnection required: Our On-Tool Charging Cord allows you to grab a tool and walk away with it. Thanks to the cord's magnetic connector the tool releases itself.



REALTIME DIAGNOSTICS

LED indicators on the battery and the charger give you instant feedback on the battery's temperature, state of charge and state of health. For more detailed battery information you can use our diagnostics software. A more extensive version of this software is available for authorized Holmatro (Dealer) Service Technicians. It combines in-depth tool diagnostics with integrated inspection procedures, to provide the best service for your Pentheon tools. Holmatro has special accessories available to connect the Pentheon tools and batteries to your laptop or pc.



USER CENTERED DESIGN COMPACT & INLINE TOOL DESIGN

: holmatro

Compact rescue tools are easier to handle and save space in your rescue truck. This is how we have managed to limit the dimensions of our high-performance Pentheon tools.

COMPACT INTEGRATED MOTOR & PUMP

Inside the tools the electric motor and the hydraulic pump share the same shaft. This saves a lot of space.



BATTERY INTEGRATED IN TOOL DESIGN

The battery has a semi-circle shape which makes it fit around the tool like a bracelet. This also contributes to the slim design of our Pentheon tools.



USER CENTERED DESIGN EASE OF USE

At Holmatro we design rescue tools with the end user in the first, second and third place. Some examples:

LED LIGHTS POWERED FROM MAIN BATTERY

Six high-output LED lights in the carrying handle illuminate your working area at night and neutralize annoying shadows during the day. They are powered from the main battery, which means they automatically switch on and off together with the tool. If desired, the lights can be switched off separately by pressing a button on the tool. But don't bother: their power consumption is next to nothing!







360° CARRYING HANDLE

With a carrying handle that goes all around the tool, you can hold the tool in any position. It also includes a suitcase grip for easy and well-balanced carrying. The handle is made of a damage-proof high-grade synthetic polymer. This extremely tough and elastic material has the unique property of always returning to its original shape.

INLINE CONTROL HANDLE WITH 360° ACCESS

Centrally positioned on the back of the tool, our control handle is always within reach. This allows for easy tool operation at all sides of the car and in any position.











ADDITIONAL FEATURES CUTTER

30° INCLINED BLADES

The angled jaw of our Pentheon Inclined Cutter offers you improved ergonomics when cutting high or low on the car. It allows you to operate the tool from a comfortable waist height. The inclined blade design also results in more space between the tool and the car, where your patient is located. For you, as a rescuer, this means easier and safer cutting.

NEW CAR TECHNOLOGY BLADE DESIGN


These U-shaped blades pull even the strongest car materials into the cutting recess, close to the central bolt, where they are cut at the highest possible force. For a superior cutting performance on the latest vehicle models.

OPTIMIZED CUTTING EDGE

Designed to withstand wear and damage even better. For a longer blade life and a superior cutting performance.

I-BOLT

The i-Bolt has a flat central bolt design without a blade holder in between. It presses the blades together directly and more firmly. This minimizes blade separation and maximizes cutting performance. The flat design also allows for better access into narrow spaces.

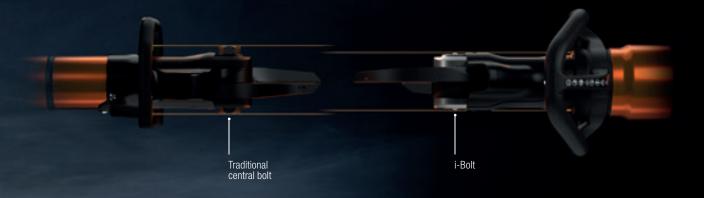



SPECIFICATIONS CUTTER PCU50



Article number	159.000.063
Max. cutting opening	7.2 in
Theoretical cutting force	312,260 lbf
Protection rate	IP57
Weight excl. battery	44.1 lb
Weight, ready for use (incl. battery)	47.4 lb
Dimensions (L x W x H)	35.1 x 10.6 x 10.8 in
NFPA 1936: 2020, cutting capacity	A8 B8 C7 D9 E9








ADDITIONAL FEATURES SPREADER

NEW EXTREME GRIP SPREADER TIPS

Unique design with pointed teeth at both sides that bite into the material. The middle row of teeth on the inside of the tips is taller and offers instant grip. The teeth on the outside alternately point in the opposite direction, to prevent the spreader from slipping away. This allows for a superior grip over the full spreading range. Finally, the interlocking profile results in smaller insertion dimensions.

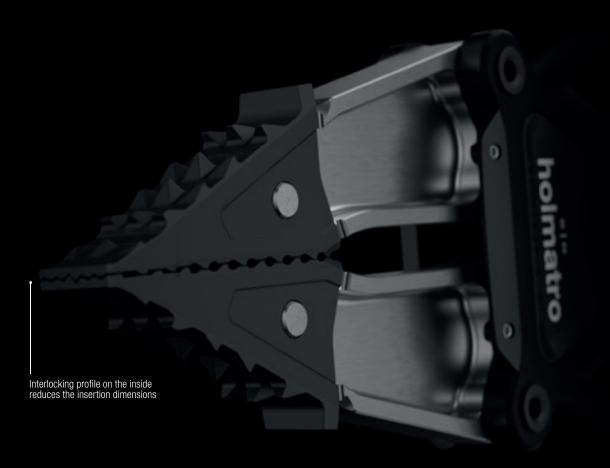





SPECIFICATIONS SPREADER PSP40



Article number	159.000.064
Spreading distance	28.5 in
Max. spreading force	62,947 lbf
Max. pulling force	11,623 lbf
Max. squeezing force	13,264 lbf
Protection rate	IP57
Weight excl. battery	39.5 lb
Weight, ready for use (incl. battery)	42.8 lb
Dimensions (L x W x H)	37.6 x 10.6 x 10.9 in
NFPA 1936: 2020, HPF	11,623 lbf
NFPA 1936: 2020, HSF	15,557 lbf
NFPA 1936: 2020, LPF	6,070 lbf
NFPA 1936: 2020, LSF	8,790 lbf





TELESCOPIC RAM **SMART RAM EXTENSION**

Now you only need one compact ram for all applications, including cross ramming from one side of the car to the other. Simply connect the optional extension pipe to bridge a gap of up to 1804 mm / 71 inches. The ram will automatically adapt its force to the new maximum length that can be achieved. All to make sure you can keep working safely.







Integrated in the ram head, the laser pointer marks the exact spot where the ram will touch the car construction. It helps you position the tool first time right, which saves time and is safer for the patient. If you would need to retract the ram to reposition it, the car construction could spring back and re-entrap your patient. The laser pointer can help you avoid this risk.



Our Pentheon ram has a double carrying handle for easy tool placement at both sides of the car. It also makes it easier to hold the ram inside the car, where space is limited. The double handle is made of a damage-proof high-grade synthetic polymer. This extremely tough and elastic material has the unique property of always returning to its original shape.

-CROSS RAM SUPPORT SET (ACCESSORY)

Specially developed to distribute the force of the ram over a larger area, our Cross Ram Support Set provides a solid platform for cross ramming. It prevents the ram from pushing through car interior surfaces, which would make it lose its effectiveness. Equipped with grip teeth for maximum hold.





SPECIFICATIONS TELESCOPIC RAM PTR50



Article number	159.000.062
Extended length	53.7 in
Extended length incl. optional extension pipe	71 in
Retracted length	22.8 in
Total spreading stroke	31 in
Spreading stroke 1st plunger	15.9 in
Max. spreading force 1st plunger	30,574 lbf
Spreading stroke 2nd plunger	15 in
Max. spreading force 2nd plunger	14,613 lbf
Protection rate	IP57
Weight excl. battery	40.6 lb
Weight, ready for use (incl. battery)	43.9 lb
Dimensions (L x W x H)	22.8 x 10.1 x 17.4 in
NFPA 1936: 2020, HSF	30,574 lbf
NFPA 1936: 2020, LSF	14,613 lbf












REMOVABLE TIPS

The combi tool tips, which are specifically designed for spreading and squeezing, can be easily removed by hand. This allows you to cut material without crushing it.

I-B0LT

Holmatro invented the i-Bolt to minimize blade separation and maximize cutting performance. It presses the blades together directly (no blade holder in between!) and more thightly. This eliminates the need to tighten the central bolt after each tool use. Finally, the i-Bolt has a flat design for better access into narrow spaces.

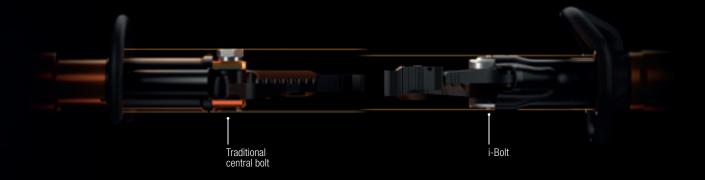

SPECIFICATIONS COMBI TOOL PCT50



Article number	159.000.118
Spreading distance	15 in
Max. spreading force	418,145 lbf
Max. cutting opening	12.6 in
Theoretical cutting force	150,622 lbf
Max. pulling force	23,380 lbf
Max. squeezing force	19,558 lbf
Protection rate	IP57
Weight excl. battery	41.4 lb
Weight, ready for use (incl. battery)	44.8 lb
Dimensions (L x W x H)	35.4 x 10.6 x 10.7 in
NFPA 1936, cutting capacity	A7 B8 C8 D8 E8
NFPA 1936: 2020, HPF	23,380 lbf
NFPA 1936: 2020, LPF	17,917 lbf
NFPA 1936: 2020, HSF	9,554 lbf
NFPA 1936: 2020, LSF	7,396 lbf



DENTHEON AGGESSORI

FOR ALL MODELS



Battery PBPA287

Battery PBPA287 (for all models)	
Article number	151.000.583
Battery type	Li-lon
Capacity	7 Ah
Energy	176 Wh
Voltage	28 VDC
Protection rate	IP67



Battery Charger PBCH...

Required accessories (for all models)	Article number
Battery Charger PBCH2 (AC-US)	151.000.742
Battery Charger PBCH3 (DC)	151.000.632

FOR ALL MODELS



Mains Power Connector PMC...



On-Tool Charging Cord POTC1

Accessories (for all models)	Article number
Mains Power Connector PMC2 (US)	151.000.743
On-Tool Charging Cord POTC1*	151.000.499
Daisy Chain Power Cord DCPC1**	151.000.503
Tool Diagnostics Cord PTDC1***	151.000.508
Battery Diagnostics Tool PBDT1****	151.000.509

- On-Tool Charging Cord POTC1; Cable to connect a Pentheon tool to the charger for the purpose of on-tool battery charging. The battery on the tool has priority over the battery on the charger.
- Daisy Chain Power Cord DCPC1; Cable to connect 2 battery chargers. Up to 3 chargers can be connected to each other and powered from one outlet.



Daisy Chain Power Cord DCPC1



Battery Diagnostic Tool PBDT1



Tool Diagnostic Cord PTDC1

- *** Tool Diagnostic Cord PTDC1; Cable to connect a Pentheon tool, or the Battery Diagnostic Tool, to a laptop or pc. Holmatro has developed special software for battery and tool diagnostics.
- **** Battery Diagnostic Tool PBDT1; To be used with Tool Diagnostic Cord PTDC1.



Accessory Set In Case ACS 02



Pulling Attachment Set PAS 02

Accessories PSP40	Article number
Accessory Set In Case ACS 02	150.182.288
Pulling Attachment Set PAS 02	150.182.274
Cutting Tip Set CTS 01	150.006.474
Spreading Tip Set STS 02	150.006.475
Pulling Chains Set In Case PCS 02	158.582.009
Pulling Chains Set PCS 01	150.582.152



Cutting Tip Set CTS 01



Spreading Tip Set STS 02



Pulling Chains Set In Case PCS 02 Pulling Chains Set PCS 01



PTR50




150.003.105

150.181.011

Extension Pipe TRE03

Ram Support HRS 22 NCT

Ram Support HRS 22



Cross Ram Support Set XRS01



Ram Support HRS 22 NCT



Ram Support HRS 22

PCT50




Spreading Tip Set STS 04



Pulling Attachment Set PAS 07

Accessories PCT50	Article number
Spreading Tip Set STS 04	150.014.731
Pulling Attachment Set PAS 07	150.182.078
Accessories Set In Case ACS 04	150.182.365
Pulling Chains Set In Case PCS 04	150.582.020
Pulling Chains Set PCS 03	150.582.261



Accessory Set In Case ACS 04



Pulling Chains Set PCS 03





Pulling Chains Set In Case PCS 04



With two high-tech production plants in the Netherlands and the USA, the strictest quality, safety and performance standards in the market and a history of groundbreaking product innovations, Holmatro is the world's leading rescue tool supplier. We are very proud to see that Holmatro tools are the first choice of many fire & rescue professionals around the globe.

DOUBLE PLUNGER RAM

First ram with twin plungers. Designed to double the spreading distance without the risk of a plunger bending.



CORE TECHNOLOGY

The world's first single hose / single coupler system. A turning point in rescue tool technology, making rescue procedures safer, quicker and easier.



First cutter with a 30-degree angled jaw, improving user comfort and maximizing working space.



A HISTARY OF INNOVA

<mark>02</mark> 2003 2004 <mark>2005</mark> 2006 2007 2008 2009 2010 2011 2012 2013 2014 <mark>2015</mark> 2016 2017 2018 2019 <mark>2020</mark> 2021 2022

WORKING PRESSURE

First hydraulic rescue tools operating at a pressure higher than 500 bar. The birth of lighter and more compact rescue equipment.

POWER PUMP

The first lightweight, mobile rescue pump enabling one man to carry a full set of tool, pump and hoses on his own.



First cutter with U-shaped NCT (New Car Technology) blades, specially designed to cut new car construction.



BATTERY TOOLS

First high-performance batterypowered rescue tools. Easy to carry and handle thanks to a low weight (< 15 kg incl. battery).



SERIES

Unparalelled speed, ultimate control and the unrestrained performance to keep working in all circumstances. Miles ahead of all other rescue tools in the market.





YOU CAN COUNT ON US, FOR LIFE

holmatro.com

- f Holmatro Rescue World
- @HolmatroRescue
- o holmatrorescue
- HolmatroRescue

Disclaimer - While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (here-after: Holmatro) cannot be held liable in any way for the consequences of activities undertaken based on this printed matter. If you have any doubts about the correctness or completeness of the information, please contact Holmatro (phone number: +31 (0)162-589200). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorization of Holmatro.